


INSTALLATION	
•	WELD IN
	BOLT IN
	STANDARD CLAMP IN
	CONCEALED CLAMP IN

DIMENSION SCHEDULE		
A	B	C
12" [305]	12 1/8"	14 1/4"
14" [356]	14 1/8"	16 1/4"
16" [406]	16 1/8"	18 1/4"
18" [457]	18 1/8"	20 1/4"



GLAZING THICKNESS RANGE FROM 1/2" [13mm] TO 3/4" [19mm].  
SPECIFY STEEL OR STAINLESS STEEL SPIGOT.

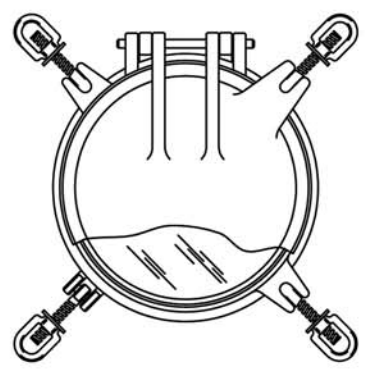

	TITLE:	MODEL NO.	REV
	OPENING PORTLIGHT	WIN-3002-W	—
		SCALE: N/A	SHEET: 1 OF: 1

## Weld in Opening Portlight with Deadlight Cover