
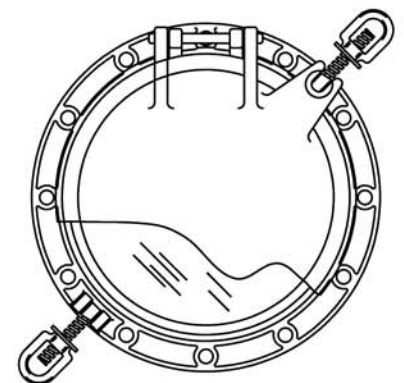


INSTALLATION

WELD IN
• BOLT IN
STANDARD CLAMP IN
CONCEALED CLAMP IN

DIMENSION SCHEDULE

A	B	C	D
10" [254]	10 1/2"	13 5/8"	11"
12" [305]	12 1/2"	16 1/2"	13 1/4"
14" [356]	14 1/2"	18 1/2"	15 1/4"
16" [406]	16 1/2"	20 1/2"	17 1/4"

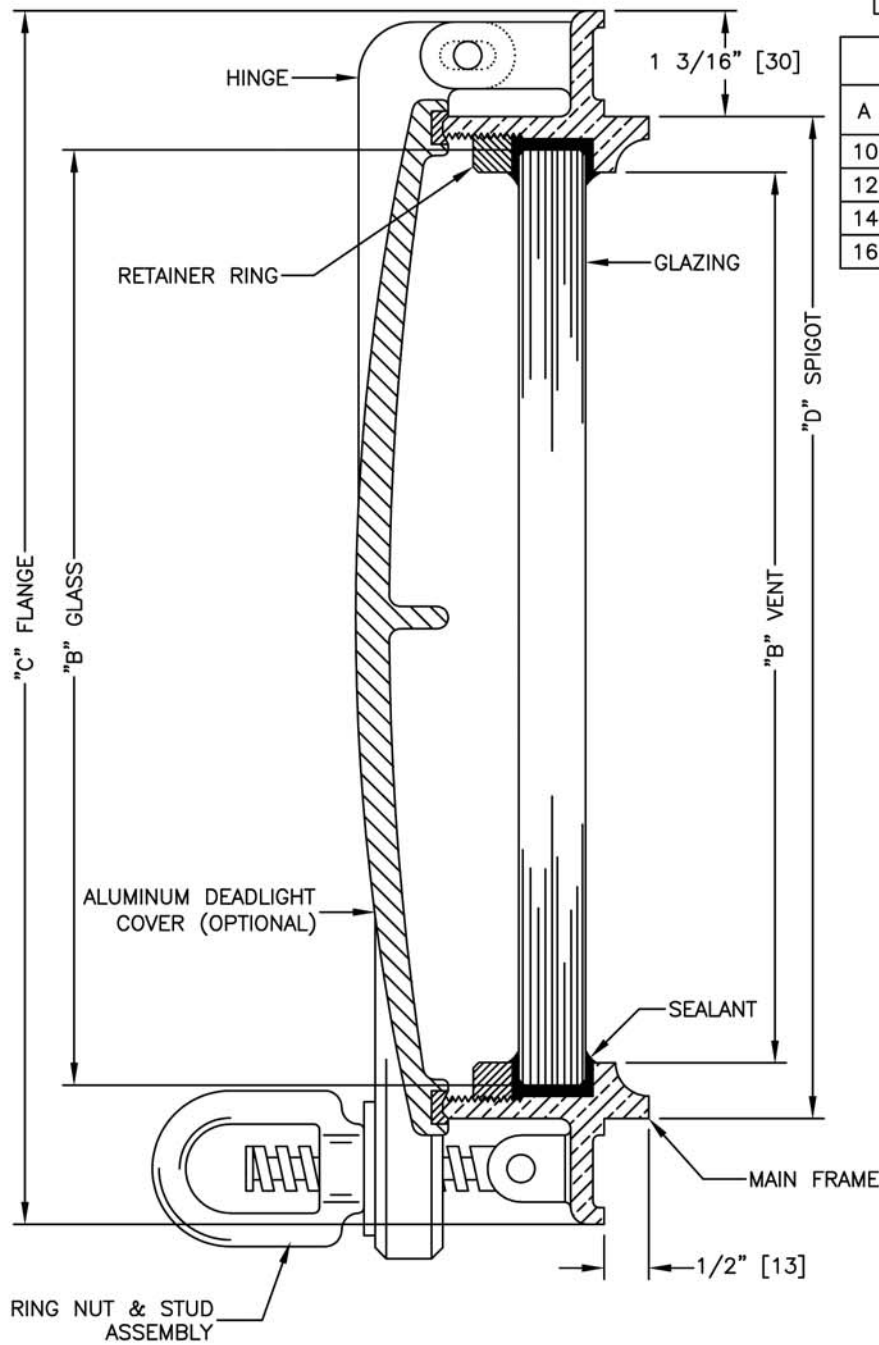

GLAZING THICKNESS RANGE FROM 1/2" [13mm] TO 3/4" [19mm]  
SPECIFY BRONZE OR ALUMINUM CONSTRUCTION.

TITLE:  
**BOLT-IN PORTLIGHT**

MODEL NO.  
**WIN-3005-B**

REV

SCALE: N/A

SHEET: 1 OF: 1

Reversed Bolt in Portlight with Deadlight Cover



PACIFIC COAST MARINE  
8000 23RD DRIVE WEST, EVERETT, WASHINGTON, USA 98203  
PHONE: +1.425.743.9550 WWW.PCMII.COM

PORTLIGHT