


| INSTALLATION | |
|--------------|--------------------|
| | WELD IN |
| • | BOLT IN |
| | STANDARD CLAMP IN |
| | CONCEALED CLAMP IN |

| DIMENSION SCHEDULE | | | |
|--------------------|-----|---------|---------|
| A | B | C | D |
| 10" [254] | 10" | 14 1/4" | 10 3/8" |
| 12" [305] | 12" | 16" | 12 3/8" |
| 14" [356] | 14" | 18" | 14 3/8" |
| 16" [406] | 16" | 20 3/8" | 16 1/2" |
| 18" [457] | 18" | 22 3/4" | 18 1/2" |

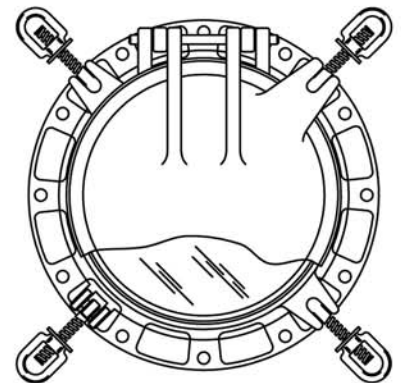

GLAZING THICKNESS RANGE FROM 1/2" [13mm] TO 3/4" [19mm].
SPECIFY BRONZE OR ALUMINUM CONSTRUCTION.

| | | | |
|--|-------------------|------------|----------------|
| | TITLE: | MODEL NO. | REV |
| | OPENING PORTLIGHT | WIN-3006-B | — |
| | | SCALE: N/A | SHEET: 1 OF: 1 |

Bolt in Opening Portlight with Deadlight Cover



PACIFIC COAST MARINE
6000 23RD DRIVE WEST, EVERETT, WASHINGTON, USA 98203
PHONE: +1.425.743.9550 WWW.PCMII.COM

PORTLIGHT