


INSTALLATION	
	WELD IN
•	BOLT IN
	STANDARD CLAMP IN
	CONCEALED CLAMP IN

DIMENSION SCHEDULE			
A	B	C	D
10" [254]	10"	14 1/4"	10 3/8"
12" [305]	12"	16"	12 3/8"
14" [356]	14"	18"	14 3/8"
16" [406]	16"	20 3/8"	16 1/2"
18" [457]	18"	22 3/4"	18 1/2"

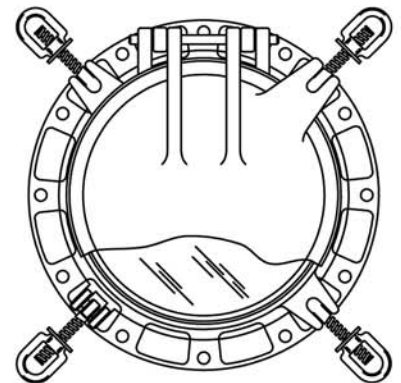

GLAZING THICKNESS RANGE FROM 1/2" [13mm] TO 3/4" [19mm].  
SPECIFY BRONZE OR ALUMINUM CONSTRUCTION.

	TITLE:	MODEL NO.	REV
	OPENING PORTLIGHT	WIN-3006-B	—
	SCALE: N/A	SHEET: 1 OF: 1	

## Bolt in Opening Portlight with Deadlight Cover



PACIFIC COAST MARINE  
6000 23RD DRIVE WEST, EVERETT, WASHINGTON, USA 98203  
PHONE: +1.425.743.9550 WWW.PCMII.COM

PORTLIGHT